


## CWT 1016 Advantage

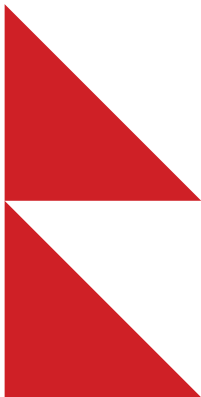

### FACTS

<b>PART NO</b>	CWT 101601
<b>CAPACITY UP TO</b>	80 m <sup>2</sup> /h (860sq. ft./h)
<b>TABLE LENGTH</b>	1640mm (5ft. 4in.)
<b>TABLE WIDTH</b>	990mm (3ft. 3in.)
<b>LENGTH OF WORKING AREA</b>	1340mm (4ft. 5in.)
<b>WIDTH OF WORKING AREA/ROLLER WIDTH</b>	950mm (3ft. 1in.)
<b>OVERALL WIDTH</b>	1195mm (3ft. 11in.)
<b>OVERALL HEIGHT</b>	1100mm (3ft. 3in.)
<b>MAX. THICKNESS OF SUBSTRATE</b>	0-70mm (0-2.8 in.)
<b>WORK HEIGHT</b>	800 mm (31.5 in.)
<b>WORK HEIGHT ADJUSTEMENT</b>	-
<b>BED SURFACE</b>	Tempered safety glass
<b>REQUIRED AIR SUPPLY</b>	6-8bar (87-116psi)
<b>NET WEIGHT</b>	125kg (275lbs)
<b>GROSS WEIGHT</b>	190kg (419lbs)
<b>PACKING DIMENSIONS</b>	1770 x 1110 x 1230m (5ft. 10in. x 3ft. 8in. x 4ft.)
<b>WARRANTY</b>	3 years

### FEATURES

<b>CUTTING MAT, SELF HEALING</b>	Yes
<b>LED ILLUMINATED LIGHT TABLE</b>	-
<b>ROLL HOLDER FOR GUIDE BEAM</b>	Yes
<b>TABLE TOP ROLL HOLDER</b>	Option
<b>SIDE POCKETS</b>	-
<b>STORAGE SHELF</b>	Yes
<b>TOOLBOX</b>	Yes
<b>SILENT COMPRESSOR</b>	Option
<b>SECOND GLIDE BEAM</b>	-
<b>WHEELS</b>	Yes
<b>LEVELING FEETS</b>	-